


Express Wall and Intermediate Top Hat Spacing
Commercial - NCC Classes 2-9

Design Wind Pressure (Ultimate) kPa	Maximum Span of Vertical ExpressWall and Intermediate Top Hats			
Spacing of Vertical Top Hats (mm)				
Nominal: Suitable for additional 10mm to fit with express joint width.				
	300	400	450	600
1.0	2450	2250	2150	1950
1.5	2150	1950	1900	1700
2.0	1950	1800	1700	1550
2.5	1800	1650	1600	1350
3.0	1700	1550	1450	1200
3.5	1600	1400	1350	1100
4.0	1550	1300	1200	NA
4.5	1450	1200	1150	NA
5.0	1350	1150	1050	NA
5.5	1300	1100	1000	NA
6.0	1200	1000	950	NA
6.5	1150	950	NA	NA
7.0	1100	950	NA	NA

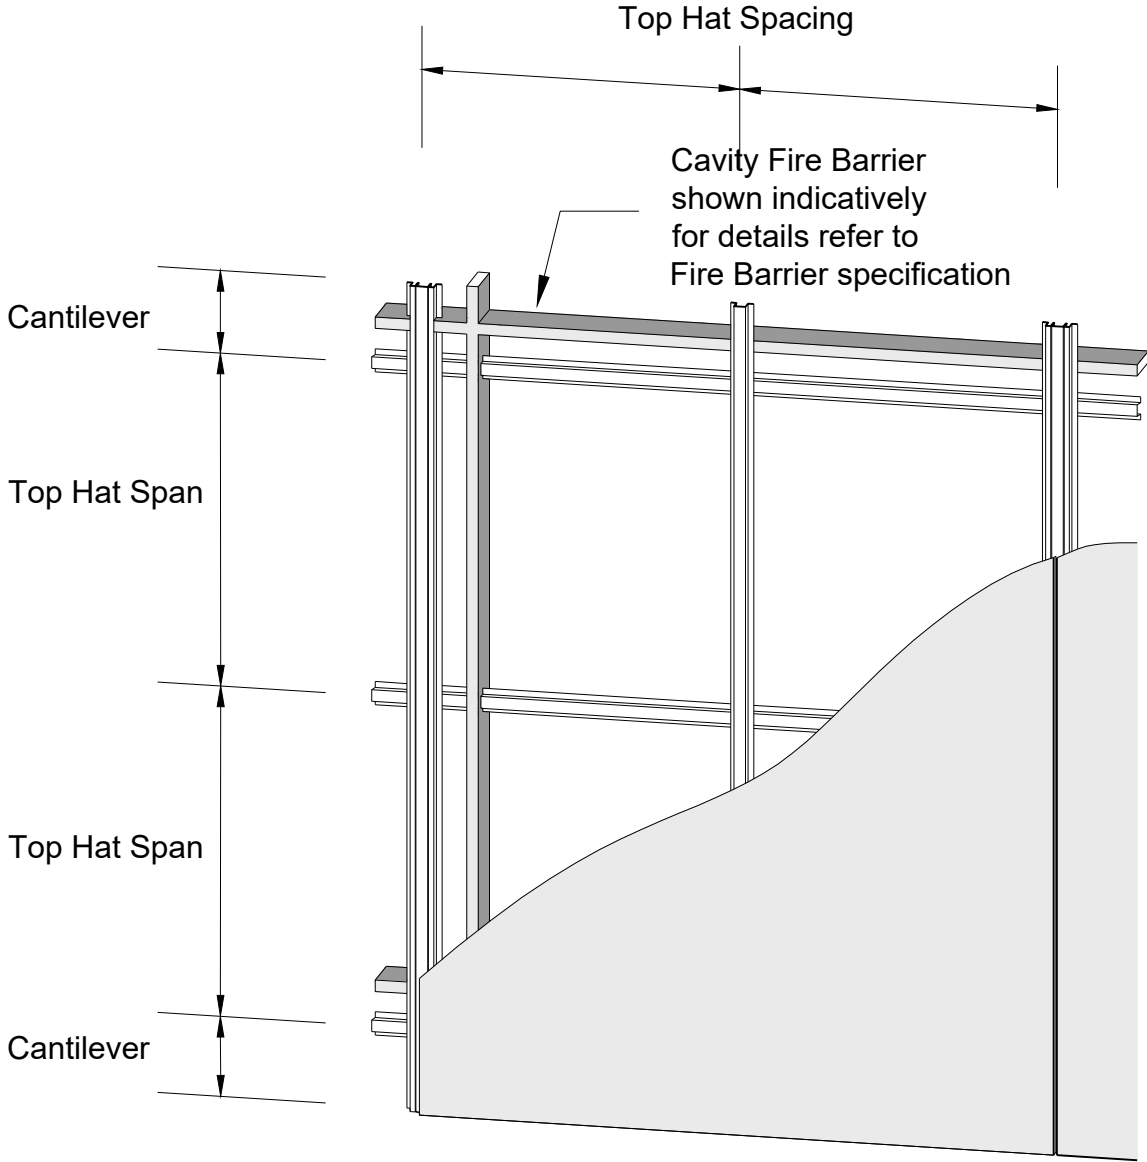

NOTES:

TITLE	SYSTEM ENGINEERING DETAILS	
CLADDING	CFC	
SUBSTRATE	ALL	Rev
DWG NUMBER	000-AC-GF-DWG-2040	4