

PANEL EDGE

20x40MM ALUMINIUM STIFFENERS, FOR
SPACING REFER TO TYPICAL PANEL
STIFFENER ARRANGMENTS

DOWSIL 896
STRUCTURAL SEALANT

SOLID ALUMINIUM CLADDING
TO ARCHITECTURAL DETAILS

SELF TAPPING GRADE 304 TEK
SCREW WITH NYLON WASHER

70x20x3mm ALUMINIUM ANGEL

2No. 10G WAFER HEAD SCREWS

25x25mm ALUMINIUM CORNER STIFFNER
WITH DOWSIL 896 STRUCTURAL SEALANT

5mm DRAINAGE SLOT

3M VHB FLAME RETARDANT TAPE 5958

SELF TAPPING GRADE 304 TEK
SCREW WITH NYLON WASHER

ALUMINIUM ANGLE TO CLOSE
CAVITY AND PREVENT VERMIN

EXISTING WINDOW

- * NON-COMBUSTIBLE PACKERS OR
TOP HAT CLEAT SYSTEM AS REQUIRED
- ** CAVITY FIRE BARRIER TYPE AND INSTALLATION
TO MEET CAVITY SIZE REQUIREMENTS
AND SUPPLIERS GUIDELINES
- *** DESIGNERS TO ASSESS REQUIREMENTS
FOR SLOTTED HOLE PANEL FIXING TO ADDRESS
THERMAL PERFORMANCE


2c - WINDOW HEAD DETAIL

SCALE 1:2

NOTES:

Specifications

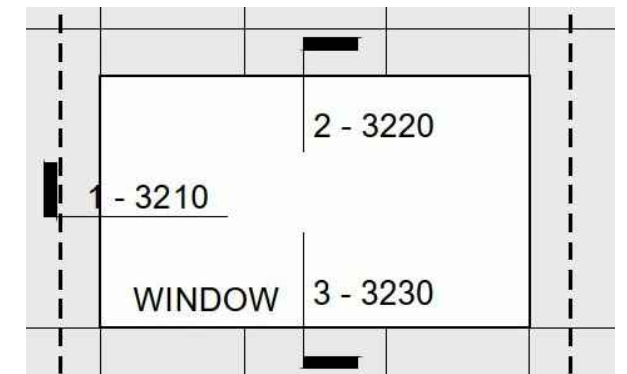

000-AC-GF-DWG-0101, 0102, 0103,
0104, 0105, 0107, 0108, 3011




Detail 2

000-AC-GF-DWG-3201

LEGEND:

-  EXISTING STRUCTURE
NOT SUBJECT TO
REMEDIAL WORKS
-  APPROXIMATE LOCATION OF
EXISTING WALL CLADDING



TITLE	WINDOW HEAD DETAIL (CURTAIN WALL SYSTEM)	
CLADDING	SOLID ALUMINIUM	
SUBSTRATE	STEEL FRAMING	Rev
DWG NUMBER	000-AC-GF-DWG-3222	1